



Toshiba Satellite L655D-S5095 Keyboard Replacement

Replace your Toshiba Satellite's undersized space bar and the rest of your keyboard.

Written By: Jerry Wakai



INTRODUCTION

Replacing the keyboard is an intermediate level repair. Following the instructions carefully will help you successfully replace your keyboard.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Locate the battery locks on the bottom of the laptop.
- Slide the right lock outwards, until it locks into place.
- Slide and hold the left lock outwards and hold it in place.

Step 2



- While holding the lock in place, slide the battery out towards you.

Step 3 — Keyboard



- Using a #1 Phillips screwdriver, remove the 5.8 mm screw in the battery slot.

Step 4



- Use a plastic opening tool to pry off the plastic panel above the keyboard.

Step 5



- Unscrew the four 3.7 mm screws at the top of the keyboard using a #1 Phillips screwdriver.


Step 6



- Slowly lift the keyboard out, up and towards the screen.

⚠ Do not try to remove the keyboard completely because it is still attached to the motherboard.

Step 7

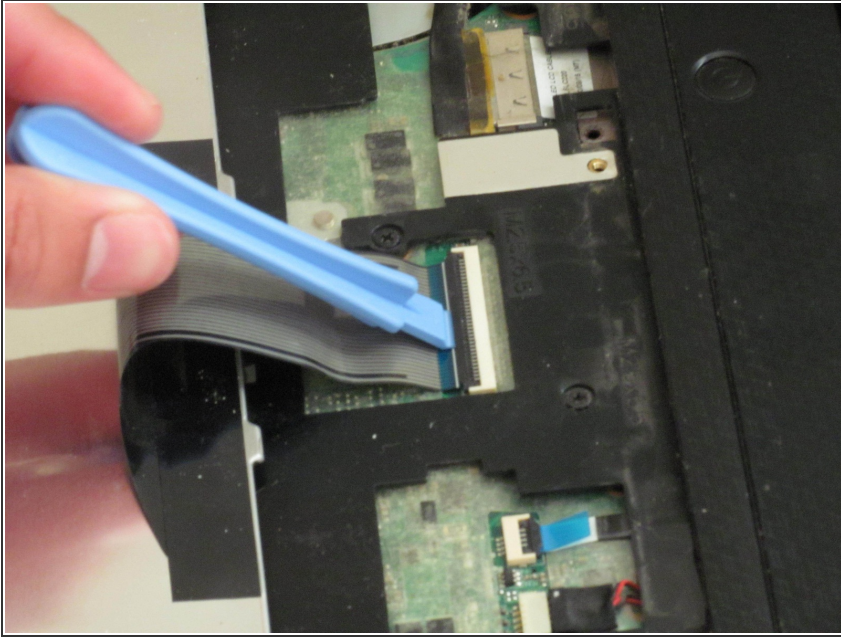

- Using a plastic opening tool, flip the ZIF connector up to release the ribbon and the keyboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-27 04:57:17 PM.